


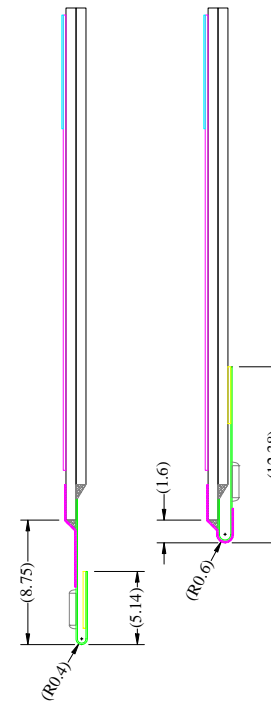
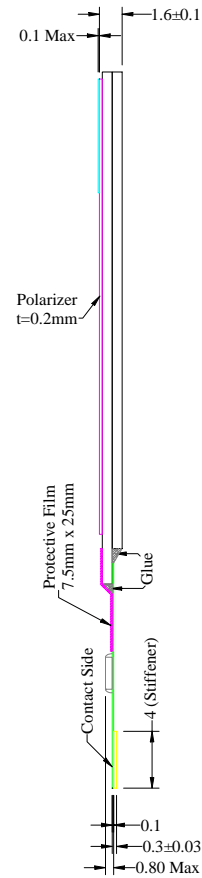


The drawing contained herein is the exclusive property of Univision. It is not allowed to copy, reproduce and or disclose in any formats without permission of Univision.

Item	Date	Remark
A	20060313	Original Drawing
B	20060526	Modify COF Pitch 0.3 -> 0.5
C	20060721	Modify Interface note and module thickness

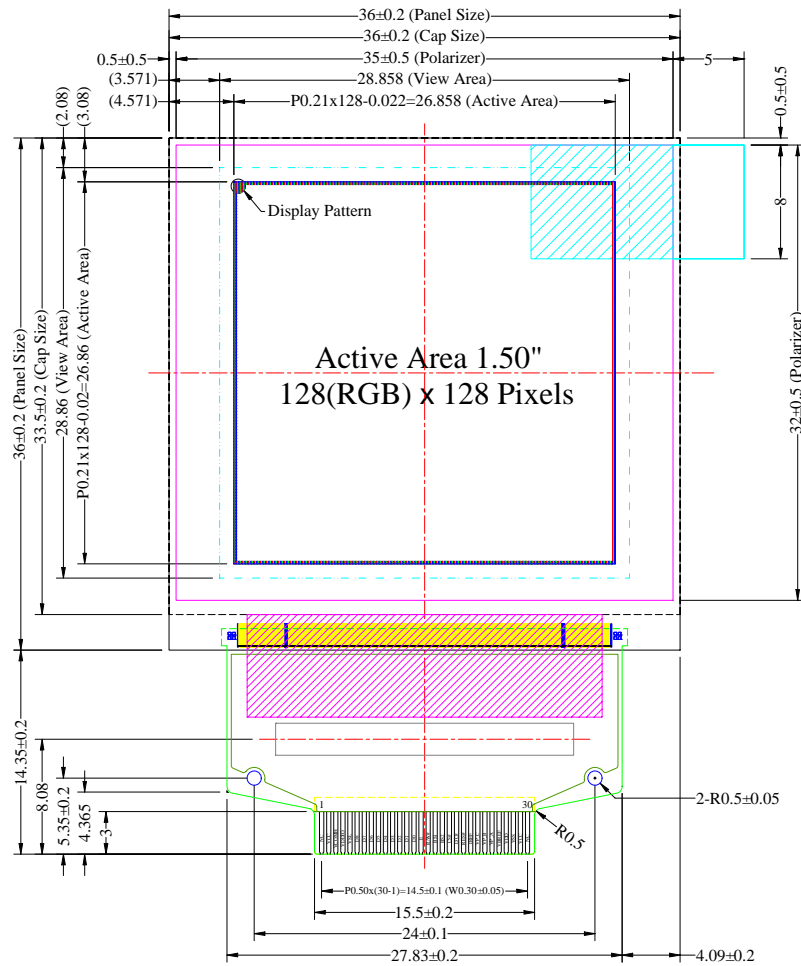

Pin	Symbol
1	NC
2	VCC
3	VCOMH
4	VDDIO
5	VSL
6	D8
7	D7
8	D6
9	D5
10	D4
11	D3
12	D2
13	D1
14	D0
15	E
16	R/W#
17	BS1
18	BS2
19	CS#
20	D/C#
21	RES#
22	IREF
23	VP_C
24	VP_B
25	VP_A
26	VBREF
27	VDD
28	VSS
29	VCC
30	NC

Notes:

1. Driver IC: SSD1339
2. Die Size: 20989um x 2250um
3. COF Number: UT-0239-F02
4. Interface: 8-/9-bit 68XX/80XX Parallel, 4-wire SPI
5. General Tolerance: ±0.30
6. The total thickness (1.70 Max) is without Polarizer protective film & Remove Tape. The actual assembled total thickness with above materials should be 1.85 Max.

Customer Approval Signature	Univision Technology Inc.				Drawing Number	Rev.
		UG-2828GDEAF01 Folding Type OEL Display Module Pixel Number: 128(RGB) x 128, 262144 Colors, COF Package				DFE2828CNCF17
Material		Soda Lime / Polyimide				
Scale		Sheet		Size		
1:1		1 of 1		A3		