

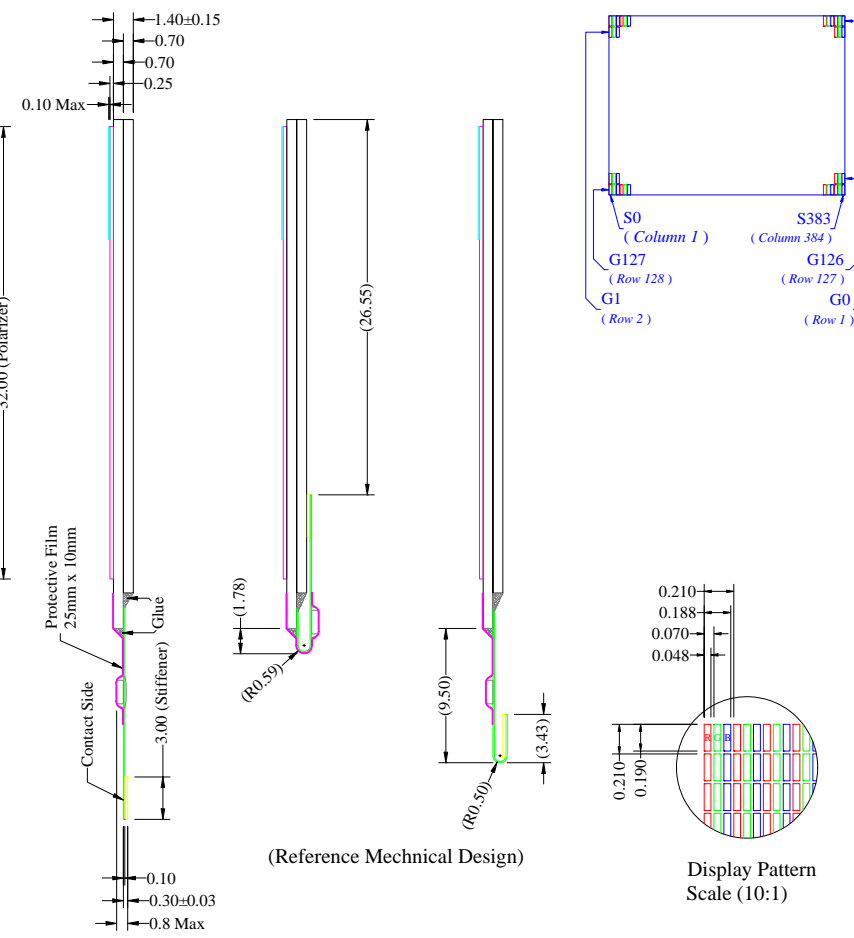


Item	Date	Remark
A	20060321	Original Drawing

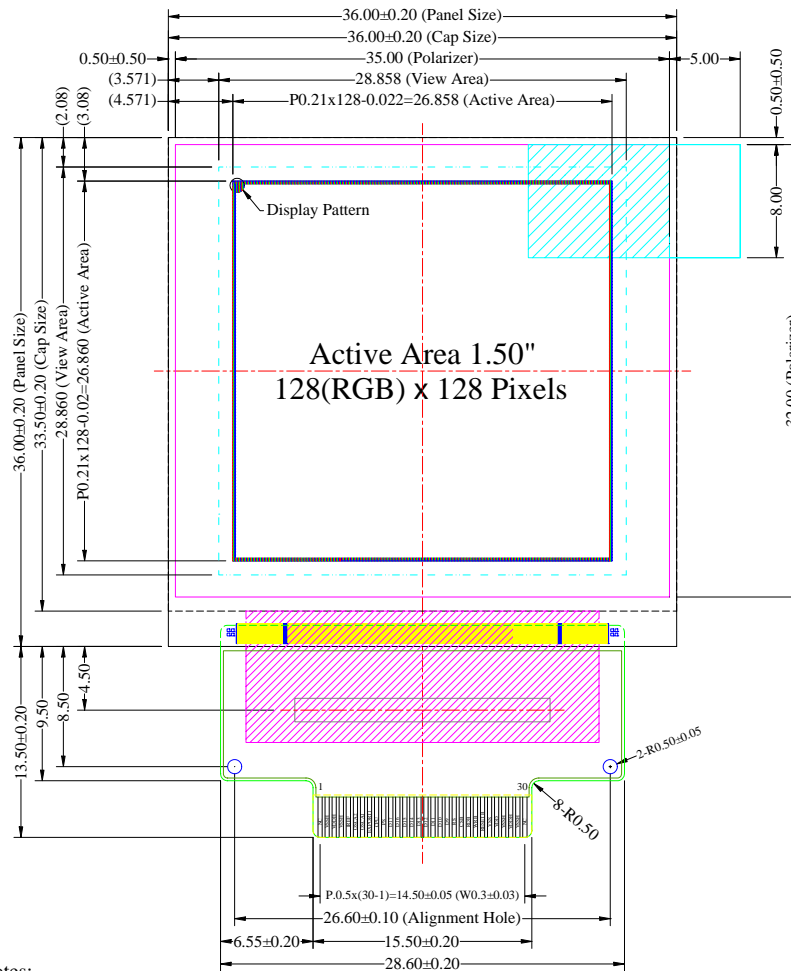

Pin	Symbol
1	NC
2	VSSH
3	VDDH
4	VSSH
5	IREF
6	OSCA2
7	OSCA1
8	EXPORT1
9	CPU
10	PS
11	D17
12	D16
13	D15
14	D14
15	D13
16	D12
17	D11
18	D10
19	D9
20	RS
21	CSB
22	RDB
23	WRB
24	RESETB
25	VSS
26	VDD
27	VSSH
28	VDDH
29	VSSH
30	NC

Notes:

1. Driver IC: SEPS225
2. Die Size: 18080um x 1670um
3. COF Number: SEPS225F2
4. Interface:
8-/9-bit 68XX/80XX Parallel, 4-wire SPI
5. General Tolerance: ±0.30
6. The total thickness (1.55 Max) is without Polarizer.
The actual assembled total thickness with above materials should be 1.90 Max

Customer Approval Signature	Univision Technology Inc.							Drawing Number		Rev.				
								DFE2828CNCNF18		A				
Unless Otherwise Specified							Title		UG-2828GDEAF02 Folding Type OEL Display Module Pixel Number: 128(RGB) x 128, 262144 Colors, COF Package				Material	
							Unit mm		Tolerance		Drawn	Checked	Reviewed	PM
General Roughness		Dimension		By	Date	Kirin Zhuang	Jerry Wang	Ray Tso	Cherry Lin	Scale	Sheet	Size		
Angle		±0.3		Date		20060321	20060321	20060321	20060321	1:1	1 of 1	A3		